SERIE SPAZIO AGRICOLO
FARMING SPACE SERIES

Modelli Land da 13kVA a 90kVA:
- ***Alternatori con moltiplicatore e attacco a tre punti per applicazione a cardano***
- ***Grado di Protezione: IP23***
- ***Moltiplicatore a bagno d'olio completo di protezione antinfortunistica***
- ***Secondo normative CE***

Land Models from 13kVA to 90kVA:
- ***Alternators with Multipliers and three-points connection for cardan shaft application***
- ***Protection Degree: IP23***
- ***Oil-bath gearbox complete with user protection***
- ***According to CE regulations***

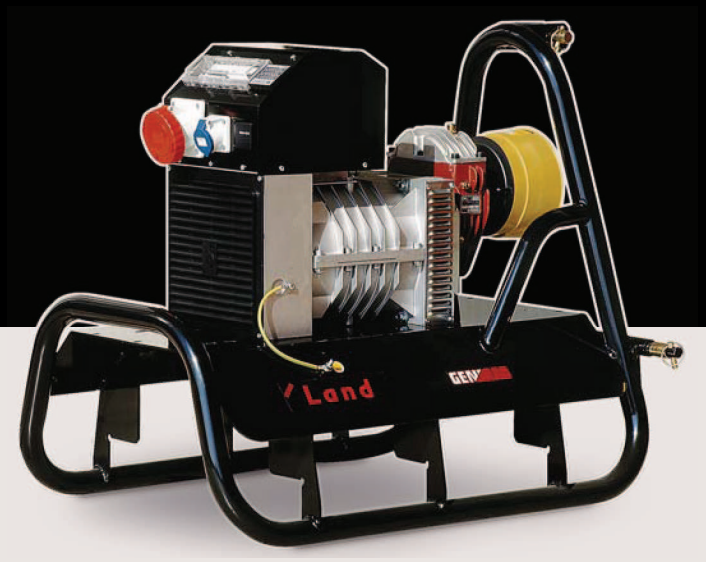

APPLICAZIONI: / APPLICATIONS:

MODELLO MODEL	*230V 1PH* Monofase Single-phase	*400V 3PH* Trifase Three-phase	*ALTERNATORE ALTERNATOR*		*POTENZA TRATTORE TRACTOR POWER*	*PRESA DI FORZA PTO*	*CAPACITÀ OLIO OIL CAPACITY*	L W H			
	max KW	*max KVA*	*tipo type*	*RPM*	*HP*	*velocità speed RPM*	*l*	*L cm*	*W cm*	*H cm*	*Kg*
LAND TR17	6.5	16	2 poles, Compound	3000	30	435	0.8	93	80	91.5	124
LAND TR27	10	27	2 poles, Compound	3000	52	435	0.8	99	80	91.5	154
LAND TR37	15	38	2 poles, Compound	3000	70	435	1.2	114	80	92	209
LAND TR13	5.2	13	4 poles, Compound	1500	28	428	0.8	93	80	92	150
LAND TR23	8.5	23	4 poles, Compound	1500	45	428	0.85	114	80	92	202
LAND TR30	12	30	4 poles, Compound	1500	58	428	0.85	114	80	92	214
LAND TR42	15	42	4 poles, AVR	1500	87	395	2.5	118	80	92	345
LAND TR53	18	53	4 poles, AVR	1500	110	395	2.5	118	80	92	361
LAND TR63	22	63	4 poles, AVR	1500	130	395	2.5	118	80	92	392
LAND TR75	25	75	4 poles, AVR	1500	150	395	2.5	160	80	104	435
LAND TR90	30	90	4 poles, AVR	1500	180	395	2.5	160	80	104	480

Dotazione Standard:
- *Interruttore Magnetotermico;*
- *Interruttore Differenziale;*
- *Voltmetro;*
- *Amperometro (Optional su TR13/TR17);*
- *Frequenzimetro;*
- *Contaore standard su TR42/TR53/TR63/ TR75/TR90;*
- *TR17/13/23: 1x CEE 16A 230V, 1x CEE 32A 400V;*
- *TR27/37/30: 1x CEE 16A 230V, 1x CEE 63A 400V;*
- *TR42: 1x schuko, 1x CEE 32A 230V, 1x CEE 63A 400V;*
- *TR53/63/75/90: 1x schuko, 1x CEE 32A 230V, 1x CEE 125A 400V.*

Standard Equipment:
- *Magnetothermal Switch;*
- *Earth Fault Breaker;*
- *Voltmeter;*
- *Ammeter (Optional on TR13/TR17);*
- *Frequencymeter;*
- *Hour Meter standard on TR42/TR53/TR63/ TR75/TR90;*
- *TR17/13/23: 1x CEE 16A 230V, 1x CEE 32A 400V;*
- *TR27/37/30: 1x CEE 16A 230V, 1x CEE 63A 400V;*
- *TR42: 1x schuko, 1x CEE 32A 230V, 1x CEE 63A 400V;*
- *TR53/63/75/90: 1x schuko, 1x CEE 32A 230V, 1x CEE 125A 400V.*

QUADRO:
PANEL:

Foto indicativa.
Picture as a way of exemple.

GENMAC POWER PRODUCTS

MADE IN ITALY